
PRODUCT SHEET

MONARCH 6032

60" x 32" x 20"

Monarch is a refined collection of therapeutic baths with distinctive Quartz deck surfaces, for a look that's noble and pure.

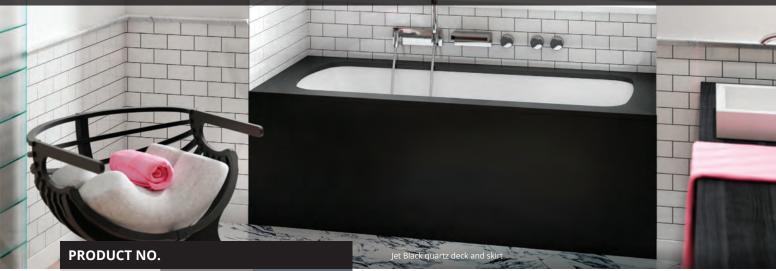

MODEL	TN	ΛU	τι	JB	
Standard (s)*	BMODR	BMODRB00T-XX		BMODRB00N-XX	
Grand Luxury (GL)*	BMLDRB00T-XX E		BMLDR	300N-XX	
THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system			gl \$		
Jets				37	
1 heated backrest			Included		
MiaPlus [®] Control (not insta	alled)			Included	
BU-Touch Control Applic	ation BUTOU	СН	\$		
Geysair®				Included	
AromaCloud®				N/A	
Illuzio Chromatherapy BCHRO6			\$		
TUB Soaker	S	\$	GL \$		
AromaCloud®				N/A	
Illuzio Chromatherapy Bo	CHRO6		\$		
WarmTouchShell [®] BWTS		\$			
DOT control		Included with therapy			
FEATURES					
Installation type			Drop-in & A	Alcove (3 walls)	
No. of bathers	•	Imp. gallo	ns	42	
US gallons	50				
INTEGRATED WASTE & OVERFLOW BOVERINI-XX					
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10			Installe	d & Included	
STANDARD COLOR (inner shell)					
White 01				Included	
QUARTZ DECK COLOR	1	E	S* DMO6032-XX	GL* BDML6032-XX	

Included

Lagos Blue 24

Jet Black 23 Included

OPTIONS (UPCHARGE APPLICABLE)


QUARTZ DECK COLOR	S* DMO6032-XX	GL* BDML6032-XX
Quasar Light 25	\$	
Piatra Bianco Woodlands Grey 26 Drift 31 30	\$	\$
Statuario Maximus 29	\$	\$
FINISH (inner shell)		
UltraVelour Matte Finish (White only) BVEL		\$
INTEGRATED WASTE & OVERFLOW BOVERINI-	xx	
Matte Black 19, Satin Brass 18		\$
WASTE & OVERFLOW 16" x 35" BOVER16-XX		
Chrome 07		\$
White 01		\$
Brushed Nickel 09, Polished Nickel 10, Oil-rubbed	Bronze 11	\$
QUARTZ SKIRT 6018 (60" x 18 7/8") BSM6018-XX		
Grey Expo 21, Noka 22		\$
Jet Black 23, Lagos Blue 24	\$	
Quasar Light 25	\$	
Piatra Grey 26, Bianco Drift 31, Woodlands 30	\$	
Statuario Maximus 29	\$	
TILE FLANGE (specify right or left)		
Ordered with bath (not installed) BTILEN	\$	
Factory-installed. Right BTILER, Left BTILEL, Special installation BTILEO	\$	
IF REQUIRED BY CONSTRUCTION CODE		
Brass waste & overflow kit** BDRCOB	\$	
Brass waste kit** BDRCB	\$	
16" x 35" Cable driven brass waste & overflow kit	\$	

BainUltra⁻

Noka 22


Grey Expo 21



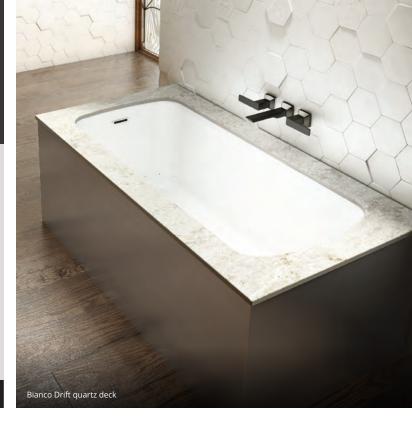


MONARCH 6032

INSTALLATION



		_
G	J	_



LETTER	DESCRIPTION	MEASURE
Α	Total length	60"
В	Total width	32"
с	Bathing well length (at height of jets)	43 5/8"
D	Bathing well width (at height of jets)	19 5/8"
E	Deck width (edges)	4"
F	Deck width (sides)	4 5/8"
G	Bath height	19 7/8"
н	Height from drain to center of overflow	15 3/8"
I	Outside edge to center drain	11 1/8"
J	Slope of backrest	24°
к	Quartz deck height	3/4"

Turbine position (TMU) Indicates heated backrest (TMU)

\$

Indicates WarmTouchShell® position (TUB)

Don't forget that this model is available in White only with choice of quartz deck color. Don't forget to specify the finish of the integrated waste & overflow.

* Standard: Quartz deck with seam. Grand Luxury: one piece Quartz deck. ** When ordered with integrated waste & overflow.

TOTAL PRICE

TECHNICAL SPECIFICATIONS				
Hot water supply required	Should be 70% of water capacity of TUB or greater.	Approx. shipping weight		
Turbine Others	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated	Turbine power		
	line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is	Air heater		
	needed 15 A. 120 V, 60 hz, dedicated line with a GFCI.	WARRANTY		
	 The GEYSAIR must always be accessible and connected to the hot water supply (provide access). Control cannot be installed on the Quartz deck. 	Controls-LED-Geysair*		
	- Optional tile flange (specify right or left).	Quartz deck*		
Our products must be installed by certified professionals only and according to our Monarch Installation Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).		Bath & turbine*		

* Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra[®] assumes no responsibility for preparatory work done prior to the product being on site.

234 lbs

550 W 600 W

5 years 15 years

20 years