

Technology

- Frameless, 5/16-inch-thick Frosted tempered glass.
- Self-closing mechanism offers superior feel and security against water leakage.
- Vertical handle complements the contemporary style.
- Ultra-low threshold creates easy entry and exit to the showering space.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Out-of-plumb adjustability for simpler installation.
- Can be installed to open to the left or right.
- Maximum width adjustability.

Installation

- Pivot shower door.
- Not for use in hospitality.
- For residential use only.

Included Components

Additional Components:
Hardware kit



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	SHP	
--	-----	--


	ABZ	
--	-----	--

	BNK	
--	-----	--

Available Glass Options

Code	Description
------	-------------

D3	Frosted
----	---------

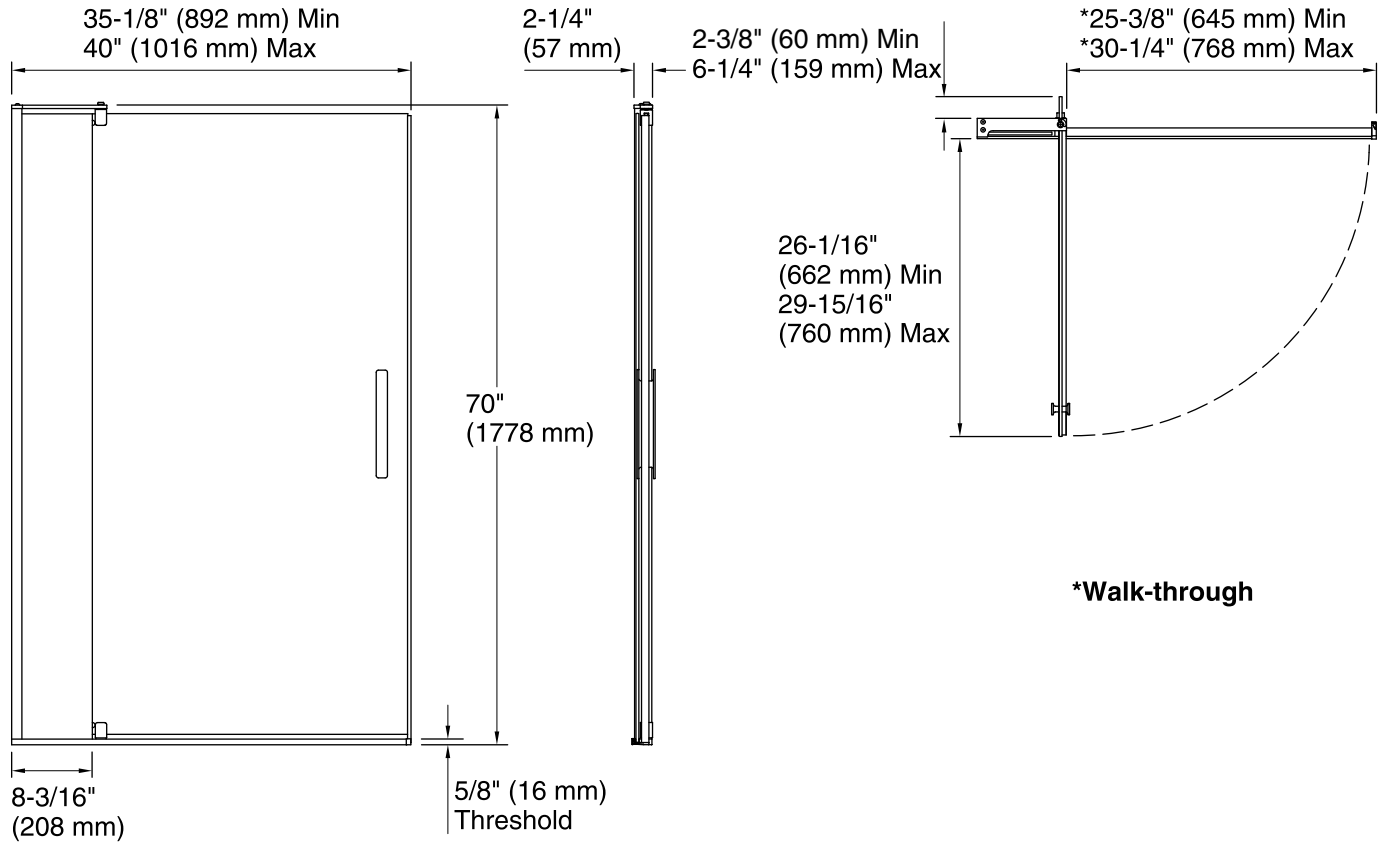

Technical Information

All product dimensions are nominal.

Installation type:	For shower base installation
Opening style:	Pivot
Opening Width - Min:	35-1/8" (892 mm)
Opening Width - Max:	40" (1016 mm)
Walk-through - Min:	25-3/8" (645 mm)
Walk-through - Max:	30-1/4" (768 mm)
Glass thickness:	5/16" (8 mm)
Glass coating:	CleanCoat®

Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 74" (1880 mm) to allow clearance for installation.